

11.2 lap.def Laplace transform and its inverse

The Laplace transform

1 The two-sided definition of the Laplace transform was encountered in [Lec. 11.1 lap.in](#). This is rarely used in engineering analysis, which prefers the following one-sided transform.²

Definition 11 lap.2: Laplace transform

Let $f : \mathbb{R}_+ \rightarrow \mathbb{R}$ be a function of time t for which $f(t) = 0$ for $t < 0$. The Laplace transform³ $\mathcal{L} : \mathcal{T} \rightarrow \mathcal{S}$ of f is defined as⁴

$$(\mathcal{L}f)(s) = \int_0^{\infty} f(t)e^{-st} dt.$$

2 As with the Fourier transform image, it is customary to _____ the Laplace transform image; e.g.⁵

$$F(s) = (\mathcal{L}f)(s).$$

3 As with the two-sided Laplace transform, if the transform exists, it will do so for some region of convergence (ROC), a subset of the s -plane. It is best practice to report a Laplace transform image paired with its ROC.

4 On the imaginary axis ($\sigma = 0$), $s = j\omega$ and the Laplace transform is

$$(\mathcal{L}f)(s) = \int_0^{\infty} f(t)e^{-j\omega t} dt, \quad (1)$$

which is the one-sided Fourier transform! Therefore, when the Laplace transform exists for a region of convergence that _____

²We will refer exclusively to the one-sided transform as the Laplace transform and will qualify “two-sided” in the other case.

³Here $\mathcal{T} = L^2(0, \infty)$ is the set of square-integrable functions on the positive reals and $\mathcal{S} = H^2(\mathbb{C}_+)$ is a Hardy space with square norm on the (complex) right half-plane (Partington, 2004, p. 7). This highly mathematical notation highlights the fact that the Laplace transform maps a real function of t to a complex function of s .

⁴For more detail, see Rowell and Wormley (1997), Dyke (2014), and Mathews and Howell (2012).

⁵Another common notation is $\mathcal{L}(f(t))$.

_____ , the one-sided Fourier transform also exists and⁶

$$(\mathcal{F}f)(\omega) = (\mathcal{L}f)(s)|_{s \rightarrow j\omega} \quad (2)$$

or, haphazardly using F to denote both transforms,

$$F(\omega) = F(s)|_{s \rightarrow j\omega}. \quad (3)$$

Box 11 lap.1 Laplace terminology

The terminology in the literature for the Laplace transform and its inverse, introduced next, is inconsistent. The “Laplace transform” is at once taken to be a function that maps a function of t to a function of s and a particular result of that mapping (technically the *image* of the map), which is a complex function of s . Even we will say things like “the value of the Laplace transform $F(s)$ at $s = 2 + j4$,” by which we really mean the image of the complex function $F(s)|_{s \rightarrow 2+j4}$ that was the image of the Laplace transform map of the real function of time $f(t)$. You can see why we shorten it.

The inverse Laplace transform

5 As with the Fourier transform, the Laplace transform has an _____ .

Definition 11 lap.3: Inverse Laplace transform

Let $s \in \mathbb{C}$ be the Laplace s and $F(s)$ a Laplace transform image of real function $f(t)$. The *inverse Laplace transform* $\mathcal{L}^{-1} : S \rightarrow T$ is defined as

$$(\mathcal{L}^{-1}F)(t) = \frac{1}{j2\pi} \int_{\sigma-j\infty}^{\sigma+j\infty} F(s)e^{st} ds.$$

⁶The same relation can be shown to hold between the two-sided Fourier and Laplace transforms.

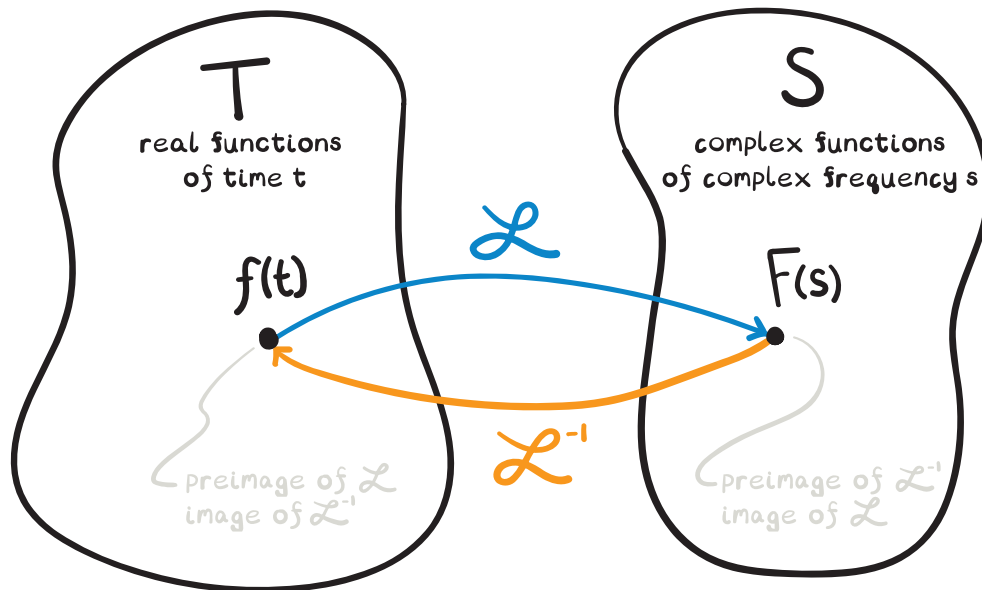


Figure def.1: Laplace transform maps \mathcal{L} and \mathcal{L}^{-1} on the function spaces T and S.

As is illustrated in Fig. def.1, it can be shown that the inverse Laplace transform image of a Laplace transform image of $f(t)$ equals $f(t)$ and vice-versa; i.e.

$$(\mathcal{L}^{-1}\mathcal{L}f)(t) = f(t) \quad \text{and} \\ (\mathcal{L}\mathcal{L}^{-1}F)(s) = F(s).$$

That is, the inverse Laplace transform is a true inverse. Therefore, we call the Laplace transform and its inverse a _____.

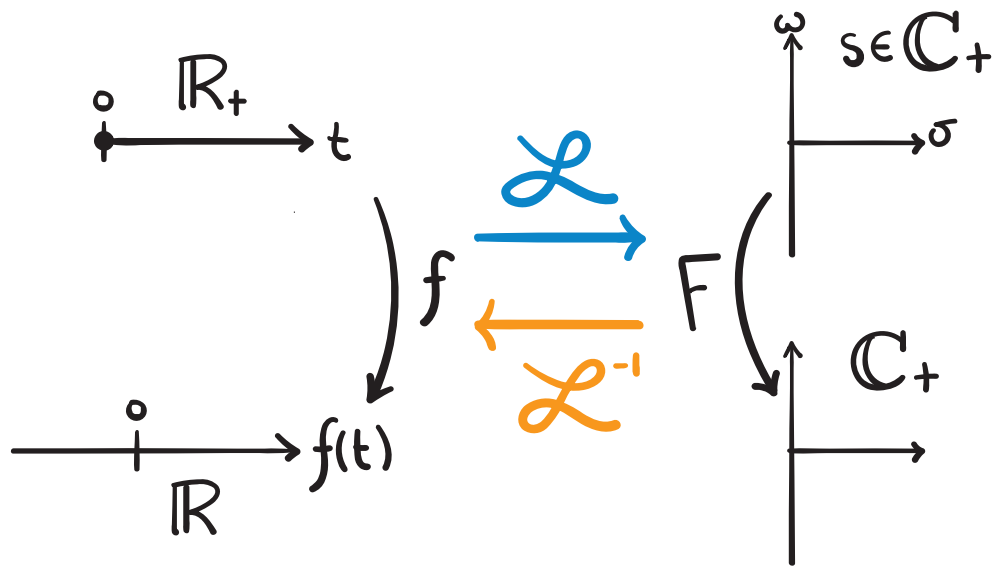


Figure def.2: detail view of Laplace transform maps \mathcal{L} and \mathcal{L}^{-1} along with their image functions f and F .

6 A detail view of Fig. def.1 is given in Fig. def.2.

Example 11.2 lap.def-1

Returning to the troublesome unit step $f(t) = u_s(t)$, calculate its Laplace transform image $F(s)$.

Directly applying the definition,

$$\begin{aligned}
 F(s) &= \int_0^{\infty} f(t)e^{-st} dt \\
 &= \underline{\hspace{2cm}} \\
 &= \frac{-1}{s} e^{-st} \Big|_{t=0}^{\infty} \\
 &= \left(\lim_{t \rightarrow \infty} -e^{-(\sigma+j\omega)t/s} \right) - \frac{-1}{s} e^0 && (s = \sigma + j\omega) \\
 &= 1/s. && (\sigma > 0)
 \end{aligned}$$

• Note that the limit only converges for $\sigma > 0$, so the region of convergence

is the right half s -plane, exclusive of the imaginary axis. This exclusion tells us what we already know, that the Fourier transform u_s does not exist. However, the Laplace transform *does* exist and is simply $1/s$!

7 Both the Laplace transform and especially its inverse are typically calculated with the help of software and tables such as [Table lap.1](#), which includes specific images and important properties. We will first consider these properties in [Lec. 11.3 lap.pr](#), then turn to the use of software and tables in [Lec. 11.4 lap.inv](#) where we focus on the more challenging inverse calculation.